

AN-2285 LM34925 Isolated Evaluation Board

1 Introduction

An isolated bias supply is implemented in this evaluation board with LM34925 Constant-On-Time regulator. The LM34925 regulator integrates both the high and low side power switches essential for creating isolated buck converter.

The following include the board specifications:

- Input Range: 20V to 100V
- Primary Output Voltage: 10V
- Secondary (Isolated) Output Voltage: 9.5V
- Maximum Load Current (Primary + Secondary): 100mA
- Maximum Power Output: 1W
- Nominal Switching Frequency: 750kHz
- Efficiency (FIN = 24V, IOU2 = 100mA): 70%
- Board size: 2 inch x 2 inch

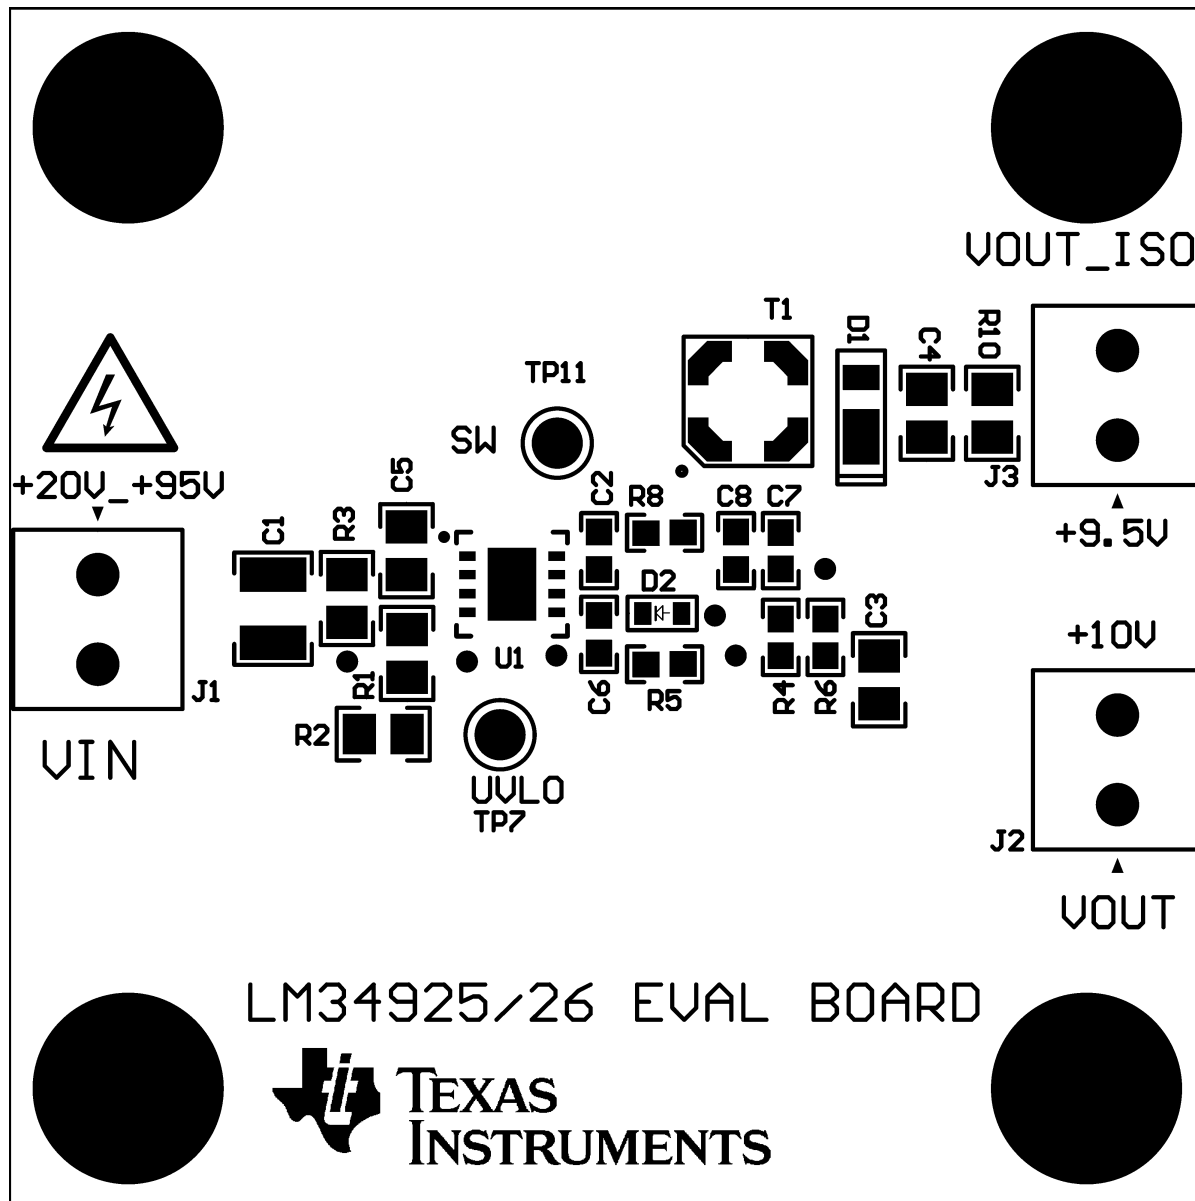


Figure 1. LM34925 Evaluation Board (Top View)

2 UVLO Threshold and Hysteresis

The UVLO resistors are selected using the following two equations:

$$V_{IN(HYS)} = I_{HYS}R_1 \quad (1)$$

and

$$V_{IN(UVLO,rising)} = 1.225V \times \left(\frac{R_1}{R_2} + 1 \right) \quad (2)$$

On this evaluation board $R_1 = 127k\Omega$ and $R_2 = 8.25k\Omega$, resulting in UVLO rising threshold at $V_{IN} = 20.5V$ and a hysteresis of 2.54V.

2.1 Board Connection and Start-up

The input connections are made using TP1 (VIN) and TP2 (GND) terminals. The primary output appears at TP3 (VOUT1) and TP4 (GND). The secondary (isolated) output is available across TP5 (VOUT2) and TP6 (IGND). The input voltage should be gradually increased above UVLO set point of 20.5V. Both the outputs (VOUT1 and VOUT2) should be close to 10V at this point. This board is designed to function with input voltage range of 20V to 100V. The minimum VIN threshold can be changed by changing the UVLO resistors R1, R2. VIN should not exceed 100V.

The magnetics in this design is optimized for solution size, and therefore limits the output power. **The total load at the output should not exceed 100mA, otherwise the coupled inductor will saturate/overheat, which can destroy both the coupled inductor and the regulator IC U1.** If a sustained over-current situation is to be tolerated, a coupled inductor with higher saturation and rms ratings should be used.

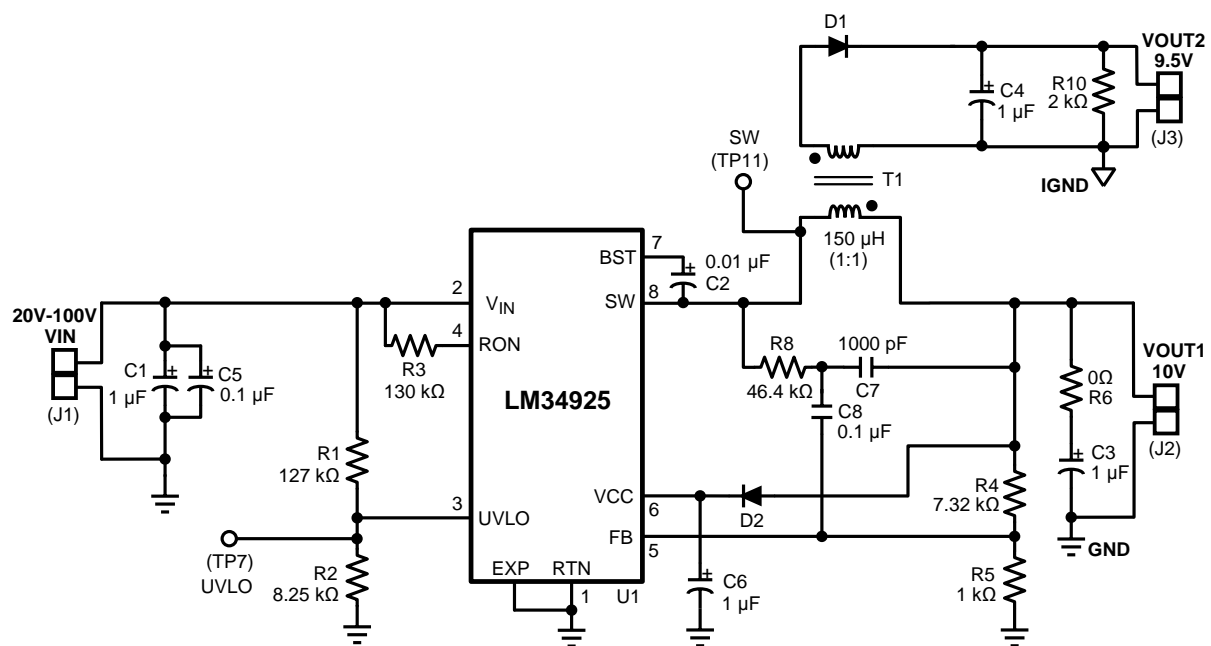


Figure 2. Complete Evaluation Board Schematic

3 Bill of Materials

Table 1. Bill of Materials

Item	Description	Mfg., Part Number	Package	Value
U1	Sync Switching Regulator	Texas Instruments, LM34925	WSON-8	100V, 100mA
T1	Coupled Inductor, 1500 VDC	Coilcraft, LPD5030V-154ME	5mm x 5mm	150uH, 0.47A
D1	Schottky Diode	Diodes Inc., DFSL1100-7	Pwr-DI123	100V, 1A
D2	Schottky Diode	Diodes Inc., SDM10U45-7	SOD-523	40V, 100mA
C1	Ceramic Capacitor	MuRata, GRM32CR72A105KA35L	1210	1uF, 100V, X7R
C2	Ceramic Capacitor	TDK, C1608X7R1C103K	0603	0.01uF, 16V, X7R
C3, C4	Ceramic Capacitor	TDK, C2012X7R1E105K	0805	1uF, 25V, X7R
C5	Ceramic Capacitor	Kemet, C0805C104K1RACTU	0805	0.1uF, 100V, X7R
C6	Ceramic Capacitor	TDK, C1608X7R1C105K	0603	1uF, 16V, X7R
C7	Ceramic Capacitor	Murata, GRM188R71E102KA01D	0603	1000pF, 25V, X7R
C8	Ceramic Capacitor	AVX, 0603YC104KAT2A	0603	0.1uF, 16V, X7R
R1	Resistor	Vishay/Dale, CRCW0805127KFKEA	0805	127kΩ, 1%
R2	Resistor	Vishay/Dale, CRCW08058K25FKEA	0805	8.25kΩ, 1%
R3	Resistor	Vishay/Dale, CRCW0805130KFKEA	0805	130kΩ, 1%
R4	Resistor	Panasonic, ERJ-3EKF7321V	0603	7.32kΩ, 1%
R5	Resistor	Panasonic, ERJ-3EKF1001V	0603	1.0kΩ, 1%
R6	Resistor	Yageo, RC0603JR-070RL	0603	0Ω
R8	Resistor	Panasonic, ERJ-3EKF4642V	0603	46.4kΩ, 1%
R10	Resistor	Panasonic, ERJ-6GEYJ202V	0805	2kΩ, 5%

4 Performance Curves

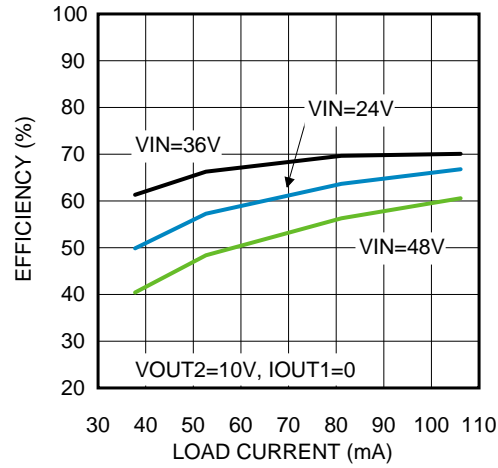


Figure 3. Efficiency at 750kHz, VOUT1=10V


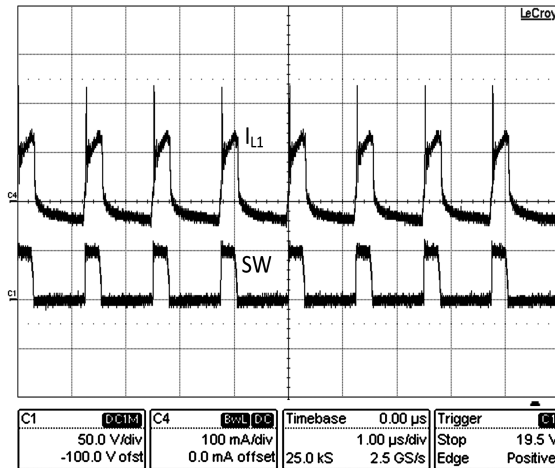


Figure 4. Steady State Waveform (VIN=48V, IOU1=0mA, IOU2= 100mA)

5 PC Board Layout

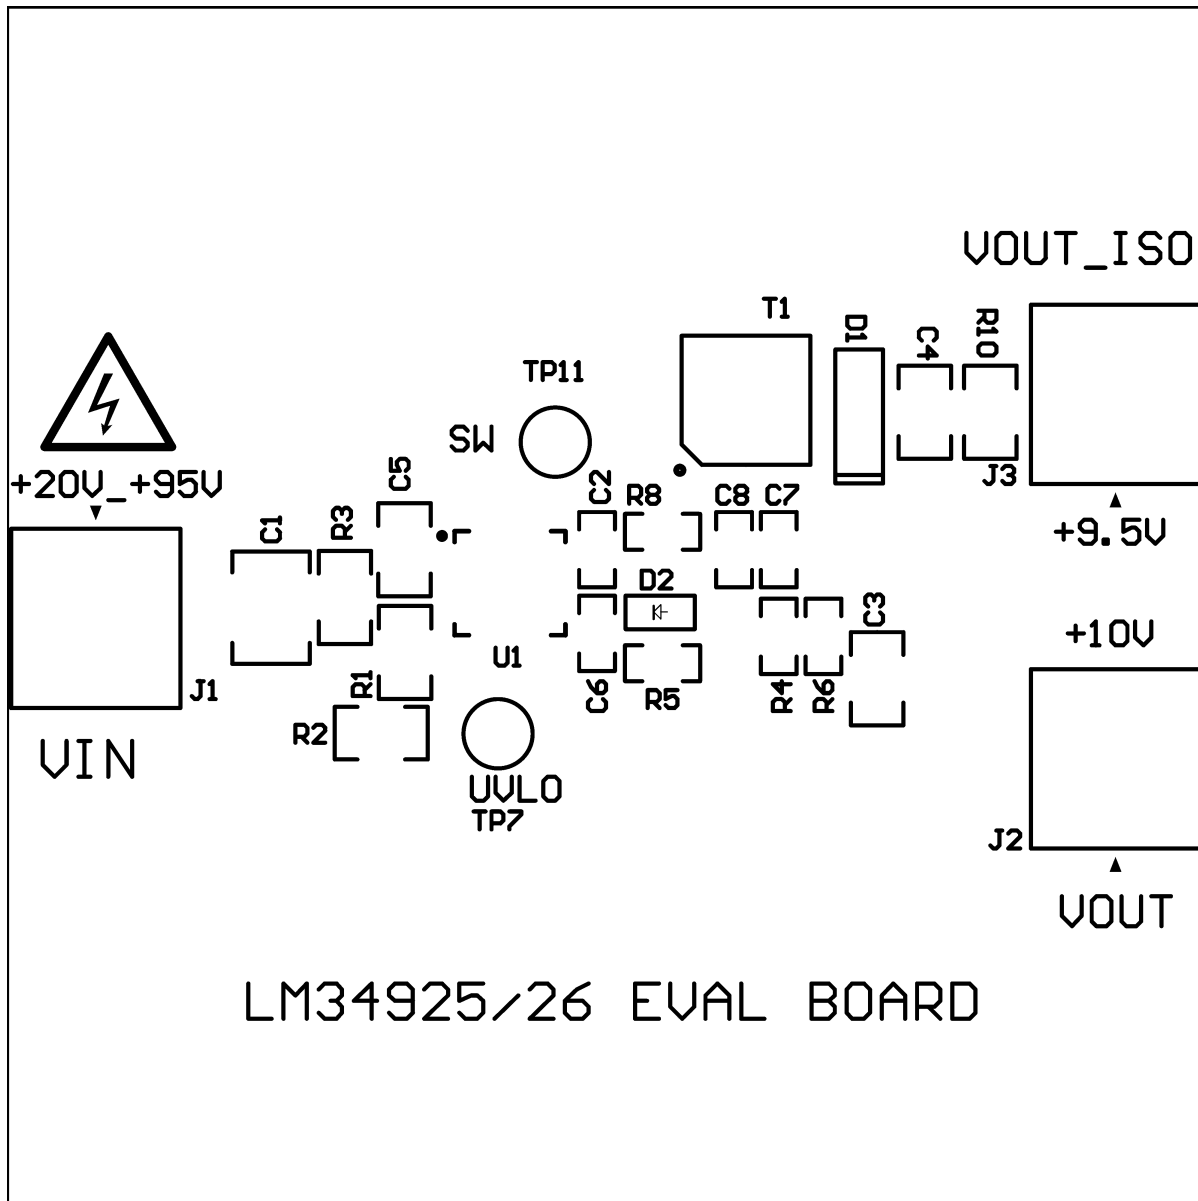

LM34925/26 EVAL BOARD

Figure 5. Board Silkscreen

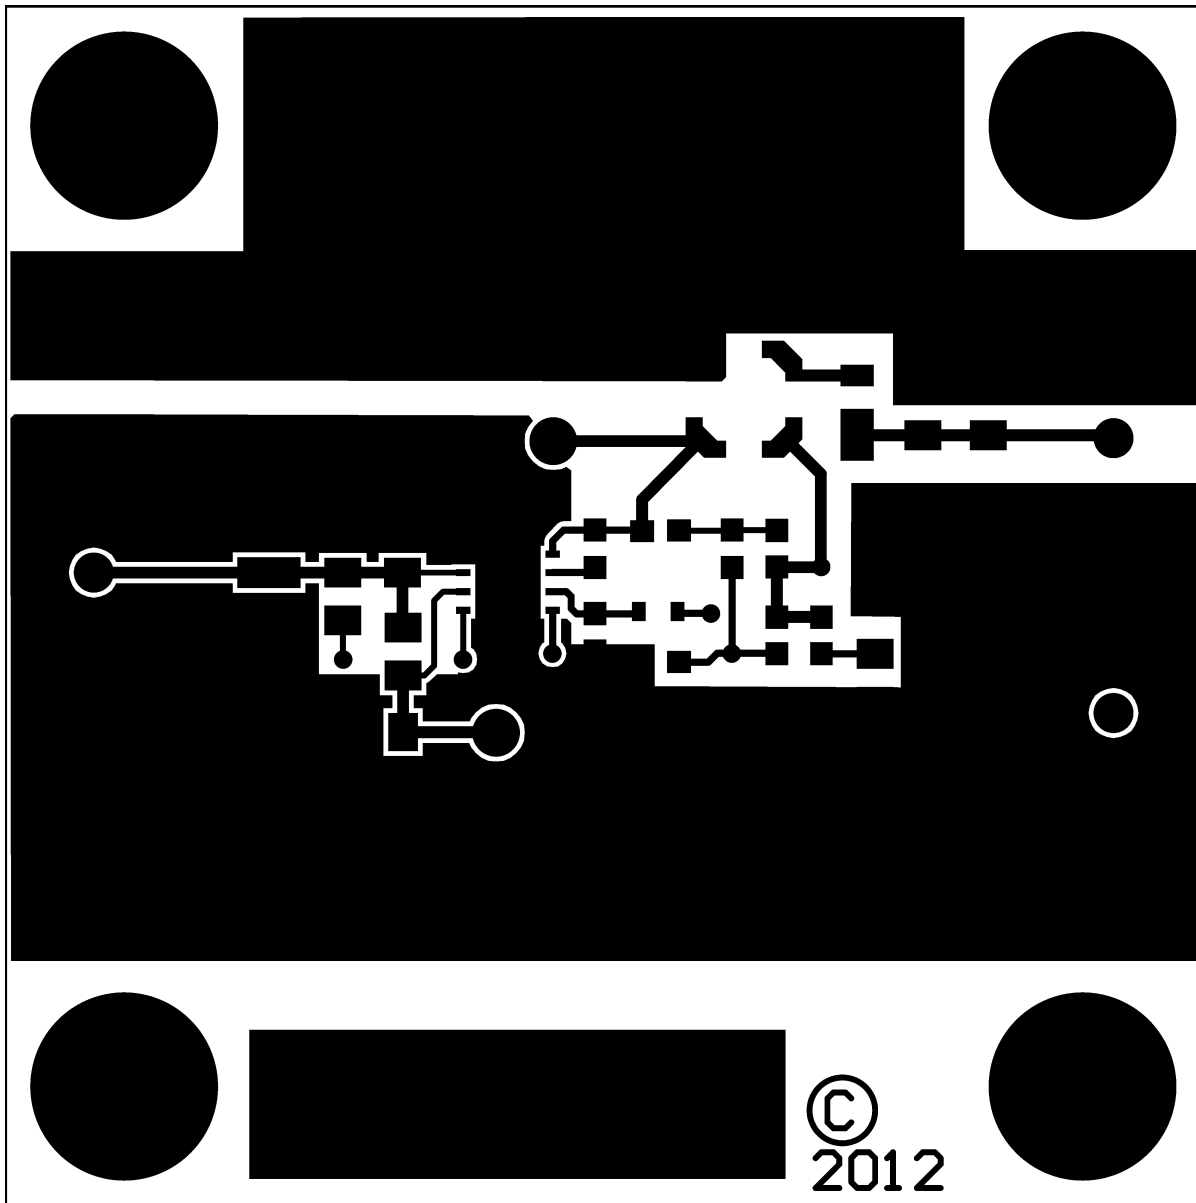


Figure 6. Board Top Layer

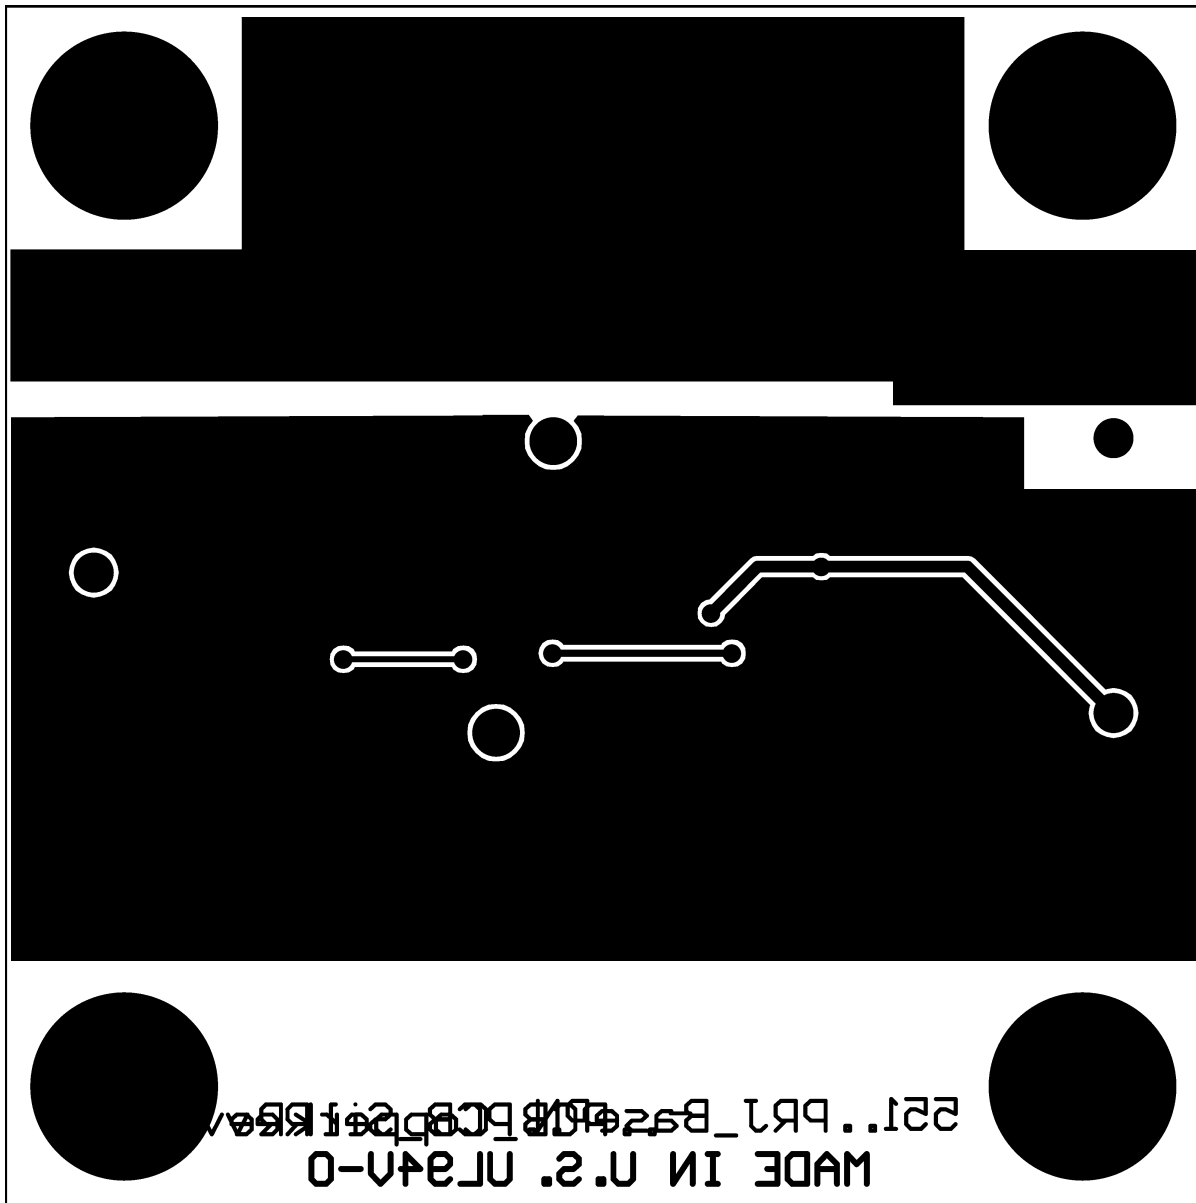


Figure 7. Board Bottom Layer

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated