


# JTAG-Mode selection:

4-wire JTAG: Set jumpers JP4 to JP9 to position 2-3  
2-wire "SpyBiWire": Set jumpers JP4 to JP9 to position 1-2

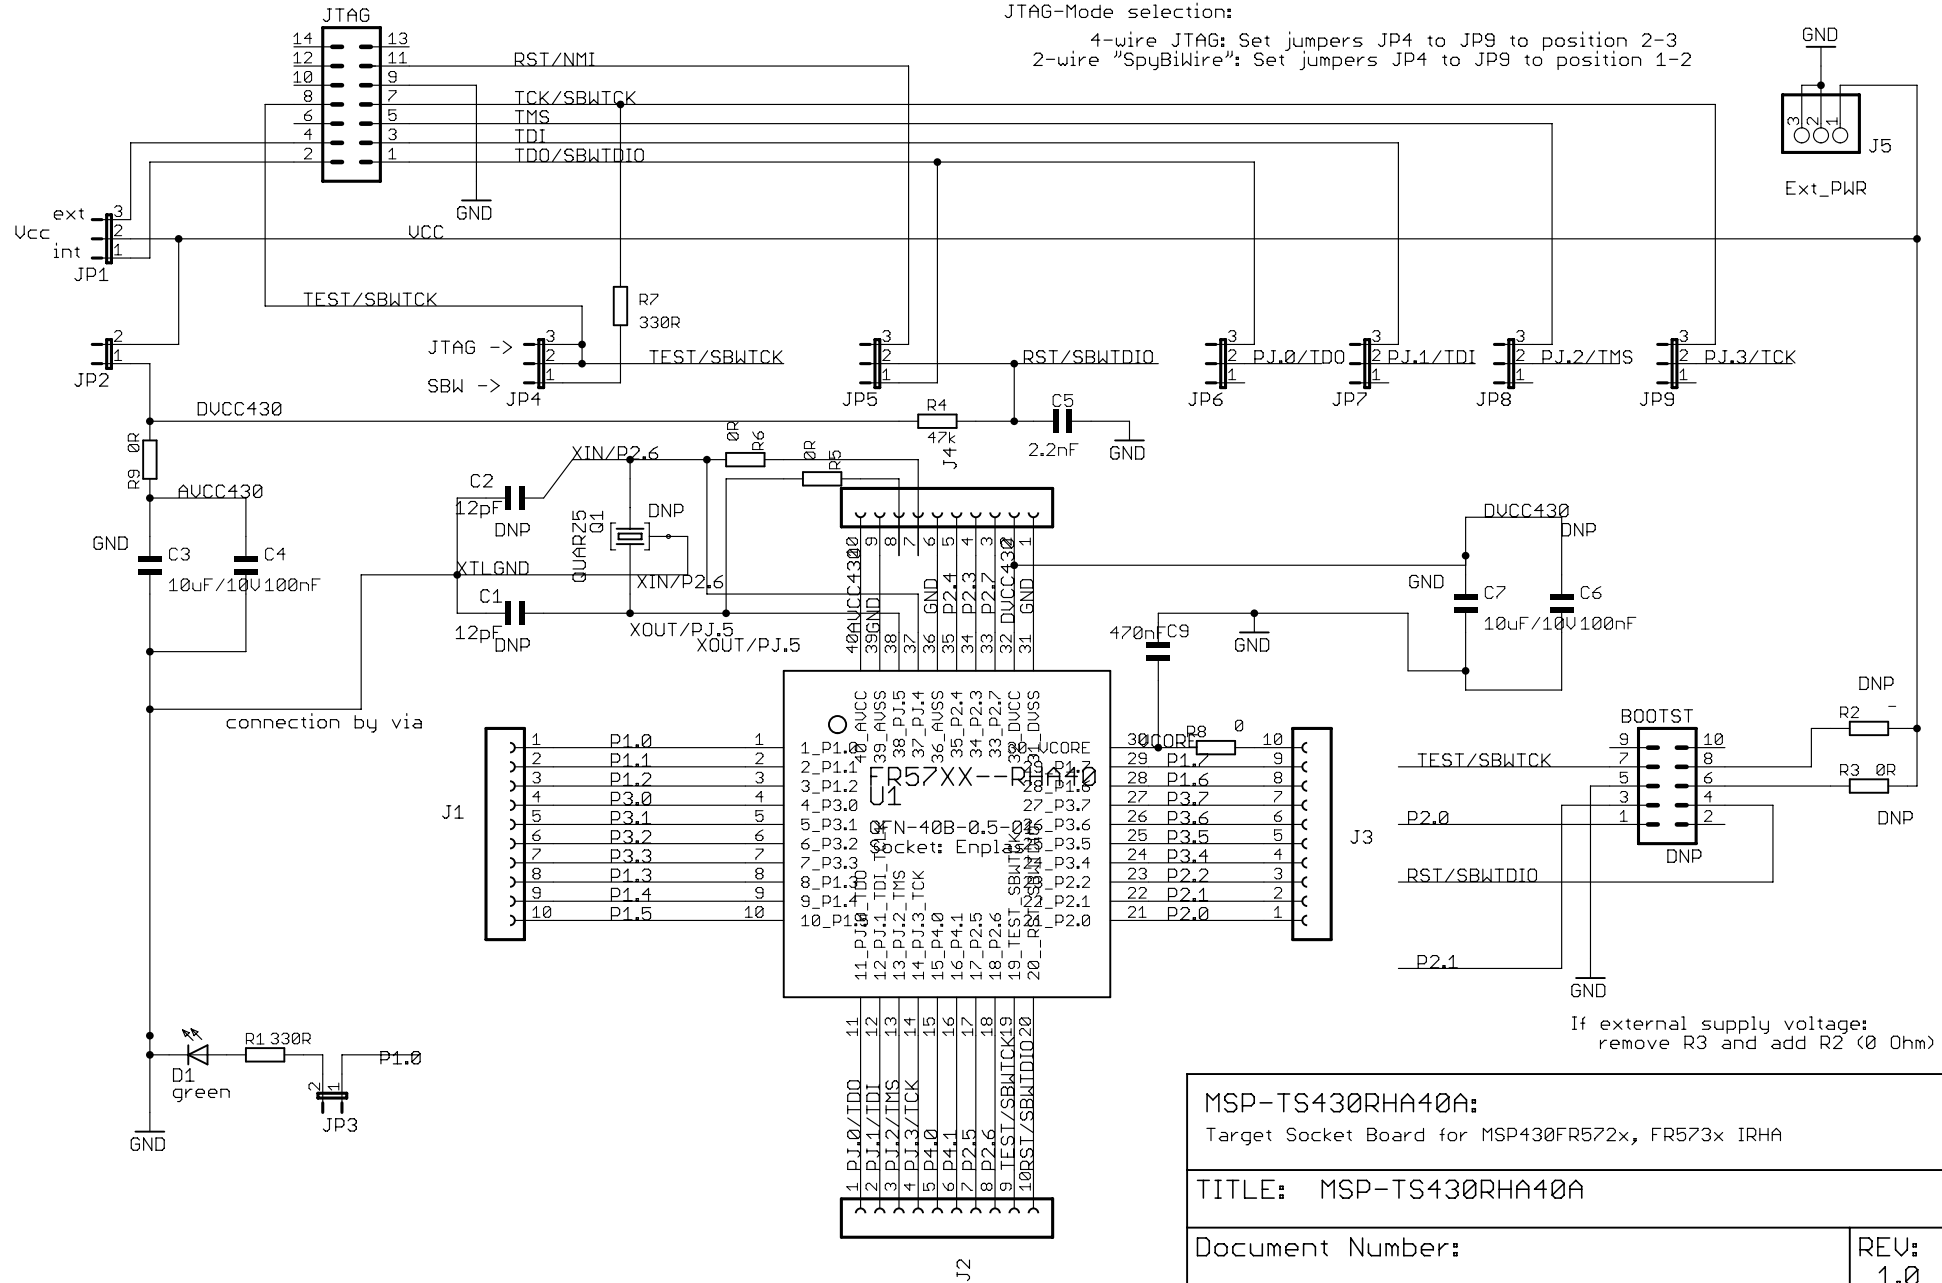

MSP-TS430RHA40A:

Target Socket Board for MSP430FR572x, FR573x IRHA

TITLE: MSP-TS430RHA40A

Document Number:



REV:  
1.0

Date: 4/21/2010 1:23:27 PM





Sheet: 1/1



JTAG





BOOTST

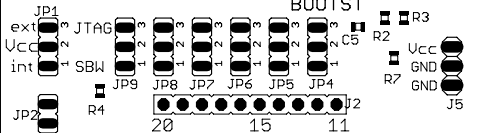


**TEXAS  
INSTRUMENTS**

MSP-TS430RHA40A  
Rev. 1.0 RoHS





ML10




47k




0R

Vcc  
GND  
GND

330R



FR57XX-FRHA40



green

0R  
470nF

100nF

10uF/10V

10uF/10V

100nF

0R



1



0R  
12p

**TEXAS  
INSTRUMENTS**

