

CSD16301Q2 25V N-Channel NexFET™ Power MOSFET

1 Features


- Ultra-low Q_g and Q_{gd}
- Low thermal resistance
- Lead-free terminal plating
- RoHS compliant
- Halogen free
- SON 2mm × 2mm plastic package

2 Applications


- DC-DC converters
- Battery and load management applications

3 Description


This 25V, 19mΩ, 2mm × 2mm SON NexFET™ power MOSFET has been designed to minimize losses in power conversion and load management applications. The 2mm × 2mm SON package offers excellent thermal performance for the size of the package.

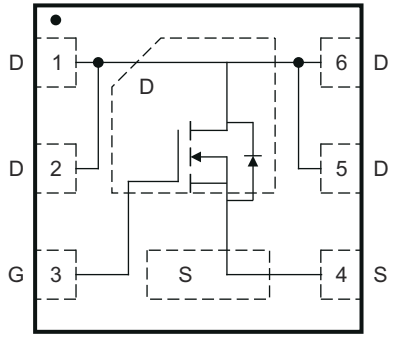

Top View

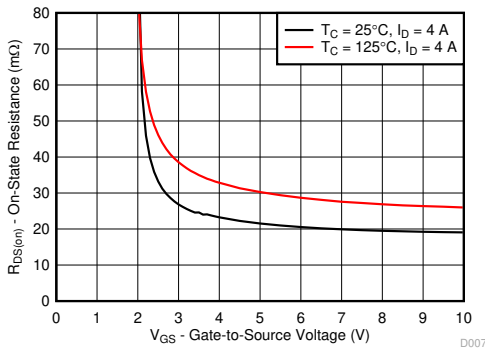

$R_{DS(on)}$ vs V_{GS}

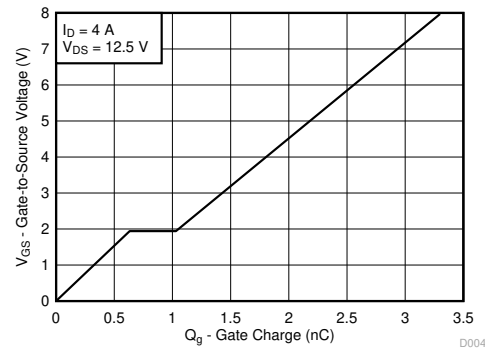

Gate Charge

Product Summary

$T_A = 25^\circ\text{C}$		TYPICAL VALUE	UNIT
V_{DS}	Drain-to-Source Voltage	25	V
Q_g	Gate Charge Total (4.5V)	2	nC
Q_{gd}	Gate Charge Gate-to-Drain	0.4	nC
$R_{DS(on)}$	Drain-to-Source On Resistance	$V_{GS} = 3V$	27
		$V_{GS} = 4.5V$	23
		$V_{GS} = 8V$	19
$V_{GS(th)}$	Threshold Voltage	1.1	V

Device Information

DEVICE	QTY	MEDIA	PACKAGE ⁽¹⁾	SHIP
CSD16301Q2	3000	7-Inch Reel	SON 2.00mm × 2.00mm Plastic Package	Reel

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$		VALUE	UNIT
V_{DS}	Drain-to-Source Voltage	25	V
V_{GS}	Gate-to-Source Voltage	+10 / -8	V
I_D	Continuous Drain Current (Package Limited)	5	A
	Continuous Drain Current (Silicon Limited), $T_C = 25^\circ\text{C}$	20	
	Continuous Drain Current ⁽¹⁾	8.2	
I_{DM}	Pulsed Drain Current ⁽²⁾	85	A
P_D	Power Dissipation ⁽¹⁾	2.5	W
	Power Dissipation, $T_C = 25^\circ\text{C}$	15	
T_J, T_{STG}	Operating Junction, Storage Temperature	-55 to 150	$^\circ\text{C}$
E_{AS}	Avalanche Energy, Single Pulse $I_D = 14A, L = 0.1mH, R_G = 25\Omega$	10	mJ

- (1) Typical $R_{\theta JA} = 50^\circ\text{C/W}$ on a 1-in², 2oz Cu pad on a 0.06in thick FR4 PCB.
 (2) Max $R_{\theta JC} = 8.4^\circ\text{C/W}$, pulse duration $\leq 100\mu\text{s}$, duty cycle $\leq 1\%$.



Table of Contents

1 Features	1	5.1 Receiving Notification of Documentation Updates.....	7
2 Applications	1	5.2 Support Resources.....	7
3 Description	1	5.3 Trademarks.....	7
4 Specifications	3	5.4 Electrostatic Discharge Caution.....	7
4.1 Electrical Characteristics.....	3	5.5 Glossary.....	7
4.2 Thermal Information.....	3	6 Revision History	8
4.3 Typical MOSFET Characteristics.....	4	7 Mechanical, Packaging, and Orderable Information	9
5 Device and Documentation Support	7		

4 Specifications

4.1 Electrical Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise specified)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC CHARACTERISTICS						
BV_{DSS}	Drain-to-source voltage	$V_{GS} = 0V, I_D = 250\mu A$	25			V
I_{DSS}	Drain-to-source leakage current	$V_{GS} = 0V, V_{DS} = 20V$			1	μA
I_{GSS}	Gate-to-source leakage current	$V_{DS} = 0V, V_{GS} = +10/-8V$			100	nA
$V_{GS(th)}$	Gate-to-source threshold voltage	$V_{DS} = V_{GS}, I_{DS} = 250\mu A$	0.9	1.1	1.55	V
$R_{DS(on)}$	Drain-to-source on resistance	$V_{GS} = 3V, I_{DS} = 4A$		27	34	m Ω
		$V_{GS} = 4.5V, I_{DS} = 4A$		23	29	
		$V_{GS} = 8V, I_{DS} = 4A$		19	24	
g_{fs}	Transconductance	$V_{DS} = 15V, I_{DS} = 4A$		16.5		S
DYNAMIC CHARACTERISTICS						
C_{ISS}	Input capacitance	$V_{GS} = 0V, V_{DS} = 12.5V, f = 1MHz$		260	340	pF
C_{OSS}	Output capacitance			165	215	pF
C_{RSS}	Reverse transfer capacitance			13	17	pF
R_g	Series gate resistance			1.3	2.6	Ω
Q_g	Gate charge total (4.5 V)	$V_{DS} = 10V, I_{DS} = 4A$		2.0	2.8	nC
Q_{gd}	Gate charge gate-to-drain			0.4		nC
Q_{gs}	Gate charge gate-to-source			0.6		nC
$Q_{g(th)}$	Gate charge at V_{th}			0.3		nC
Q_{OSS}	Output charge	$V_{DS} = 12.5V, V_{GS} = 0V$		3.0		nC
$t_{d(on)}$	Turnon delay time	$V_{DS} = 12.5V, V_{GS} = 4.5V, I_{DS} = 4A$ $R_G = 2\Omega$		2.7		ns
t_r	Rise time			4.4		ns
$t_{d(off)}$	Turnoff delay time			4.1		ns
t_f	Fall time			1.7		ns
DIODE CHARACTERISTICS						
V_{SD}	Diode forward voltage	$I_{DS} = 4A, V_{GS} = 0V$		0.8	1	V
Q_{rr}	Reverse recovery charge	$V_{DD} = 12.5V, I_F = 4A, di/dt = 200A/\mu s$		5.1		nC
t_{rr}	Reverse recovery time			11		ns


4.2 Thermal Information

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

THERMAL METRIC		MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-case thermal resistance ⁽¹⁾			8.4	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient thermal resistance ^{(1) (2)}			65	$^\circ\text{C/W}$


(1) $R_{\theta JC}$ is determined with the device mounted on a $1in^2$ ($6.45cm^2$), 2oz (0.071mm) thick Cu pad on a $1.5in \times 1.5in$ ($3.81cm \times 3.81cm$), 0.06in (1.52mm) thick FR4 PCB. $R_{\theta JC}$ is specified by design, whereas $R_{\theta JA}$ is determined by the user's board design.

(2) Device mounted on FR4 material with $1in^2$ ($6.45cm^2$), 2oz (0.071mm) thick Cu.

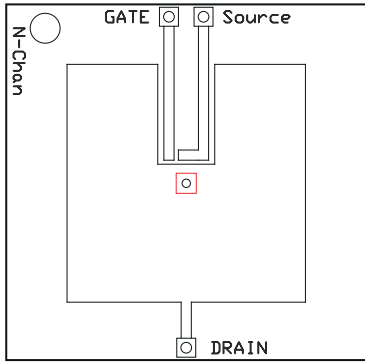

M0164-01

Max $R_{\theta JA}$ = 65°C/W when mounted on 1in² (6.45cm²) of 2oz (0.071mm) thick Cu.

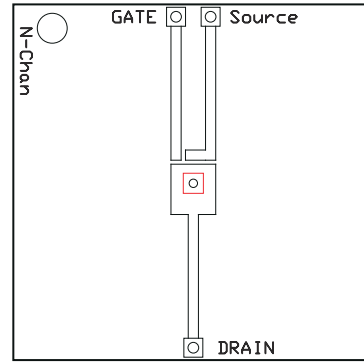


M0164-02

Max $R_{\theta JA}$ = 250°C/W when mounted on minimum pad area of 2oz (0.071mm) thick Cu.







4.3 Typical MOSFET Characteristics

T_A = 25°C (unless otherwise specified)

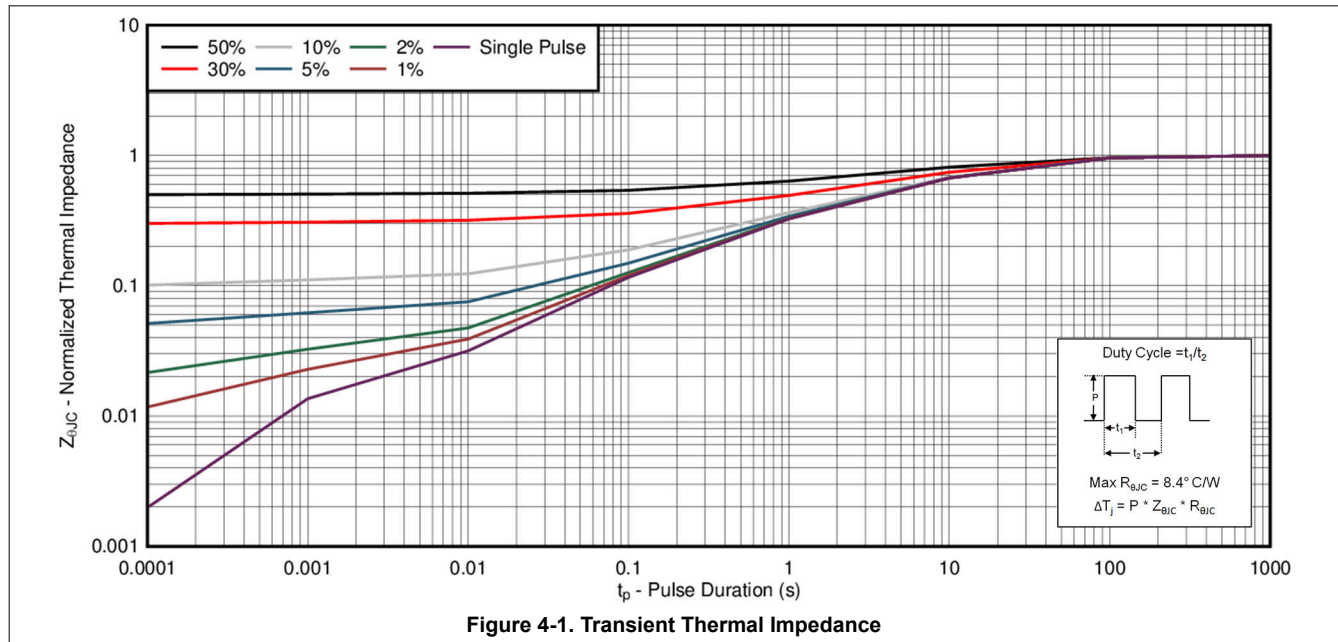

4.3 Typical MOSFET Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise specified)

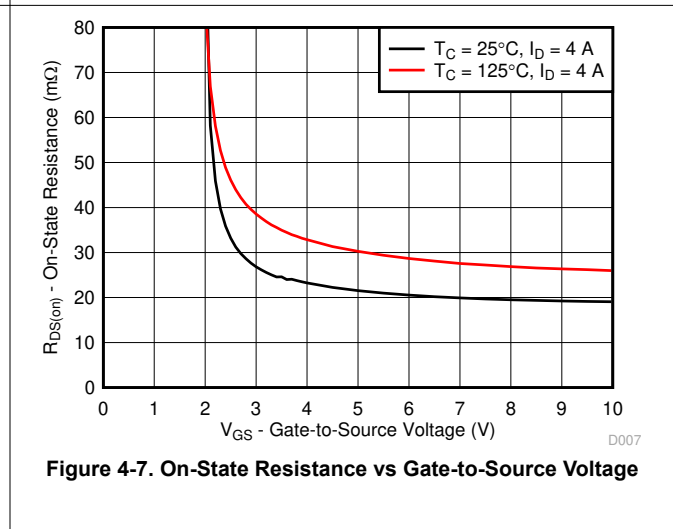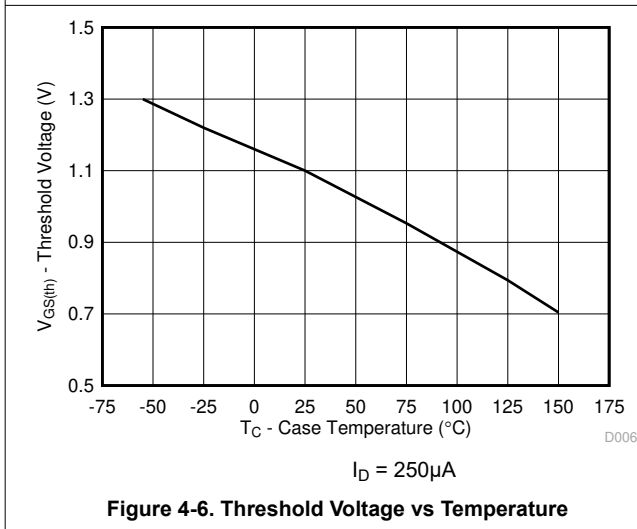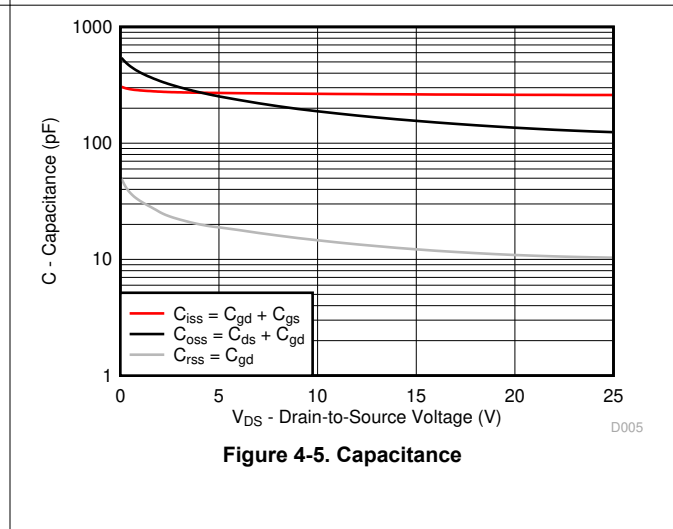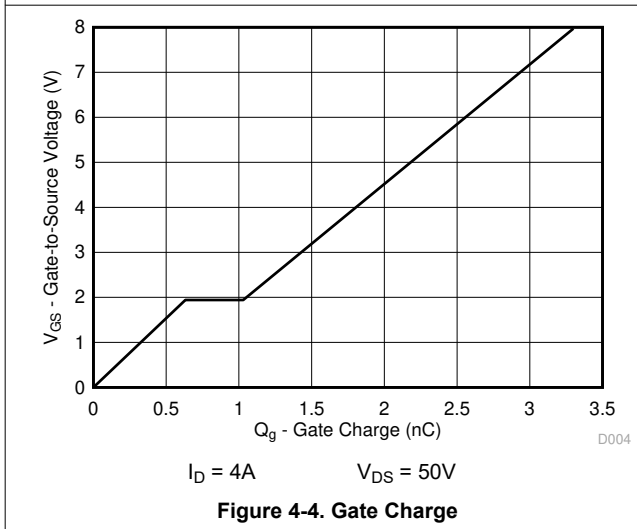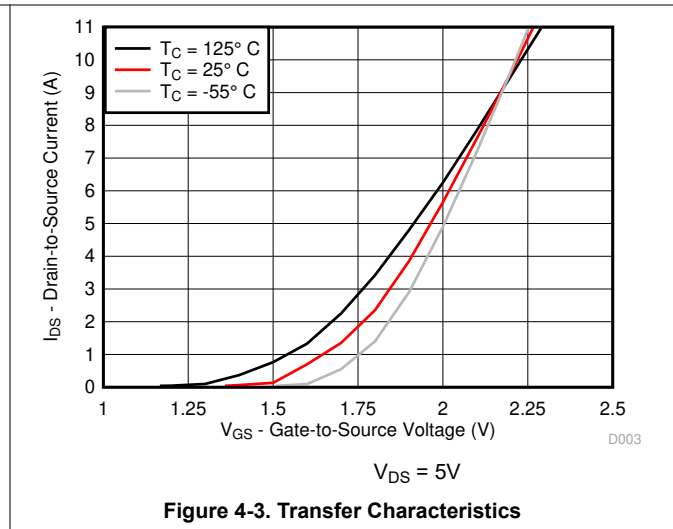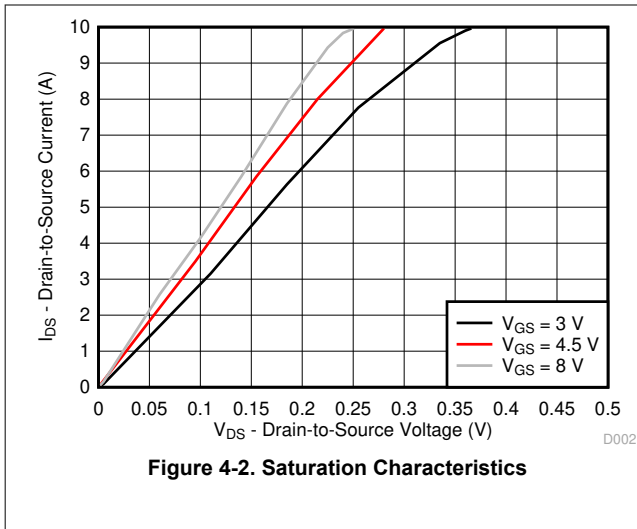

4.3 Typical MOSFET Characteristics (continued)

T_A = 25°C (unless otherwise specified)

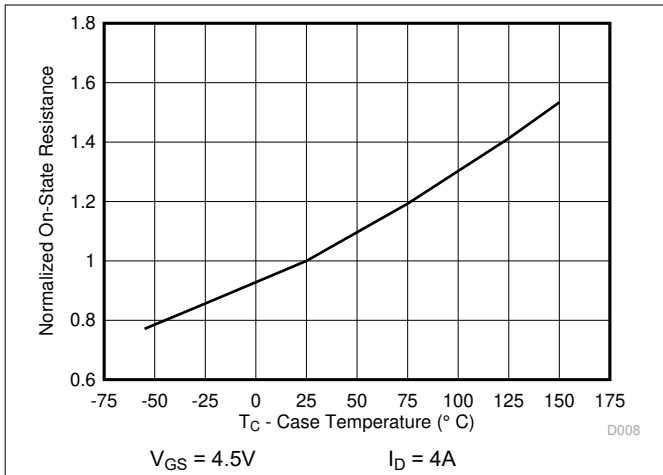


Figure 4-8. Normalized On-State Resistance vs Temperature

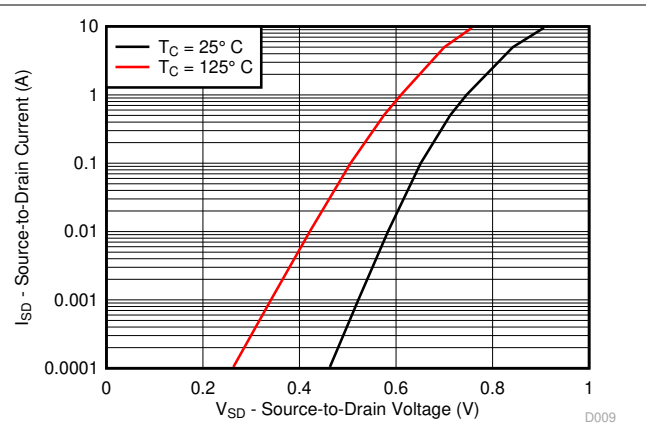


Figure 4-9. Typical Diode Forward Voltage

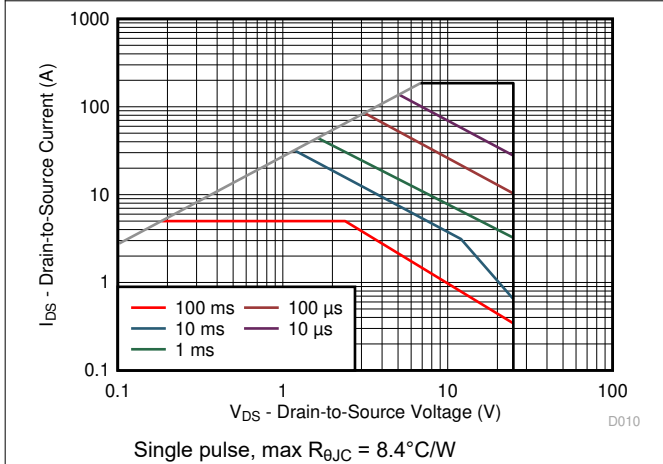


Figure 4-10. Maximum Safe Operating Area

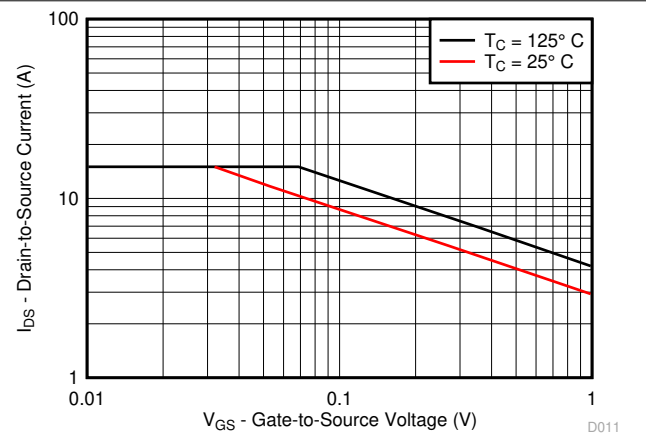


Figure 4-11. Single Pulse Unclamped Inductive Switching

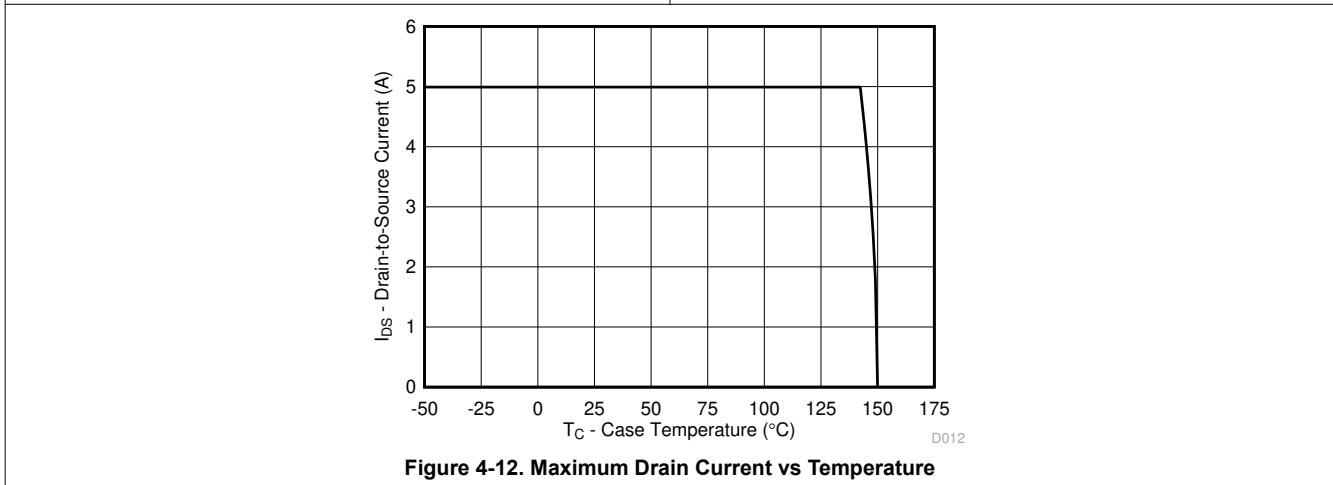


Figure 4-12. Maximum Drain Current vs Temperature

5 Device and Documentation Support

5.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

5.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

5.3 Trademarks

NexFET™ and TI E2E™ are trademarks of Texas Instruments.

All trademarks are the property of their respective owners.

5.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

5.5 Glossary

[TI Glossary](#)

This glossary lists and explains terms, acronyms, and definitions.

6 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision D (November 2016) to Revision E (March 2024)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Removed CSD16301Q2T small reel option.....	1
<hr/>	
Changes from Revision C (July 2011) to Revision D (November 2016)	Page
• Added <i>Device and Documentation Support</i> section.....	1
• Changed <i>Description</i> text.....	1
• Changed Q_g voltage condition from $-4.5V$: to $4.5V$ in <i>Product Summary</i> table.....	1
• Added silicon limited continuous drain current to <i>Absolute Maximum Ratings</i> table.....	1
• Added max power dissipation at $T_C = 25^\circ C$ to <i>Absolute Maximum Ratings</i> table.....	1
• Changed Note 1 and Note 2 in <i>Absolute Maximum Ratings</i> table.....	1
• Changed $R_{\theta JA}$ max from $69^\circ C/W$: to $65^\circ C/W$	3
• Changed Figure 4-1 to reflect a transient $R_{\theta JC}$ curve.....	4
• Changed the safe operating area in Figure 4-10 to reflect measured data.....	4
• Changed <i>MECHANICAL DATA</i> section to <i>Mechanical, Packaging, and Orderable Information</i> section.....	9
<hr/>	
Changes from Revision B (April 2010) to Revision C (July 2011)	Page
• Added a 7-Inch Reel option to the Ordering Information Table.....	1
<hr/>	
Changes from Revision A (December 2009) to Revision B (April 2010)	Page
• Added title to Figure 4-11 - Single Pulse Unclamped Inductive Switching.....	4
<hr/>	
Changes from Revision * (October 2009) to Revision A (December 2009)	Page
• Changed the Electrical Characteristics table - $V_{GS(th)}$ MAX value From: 1.4V To 1.55V.....	3
<hr/>	

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CSD16301Q2	ACTIVE	WSON	DQK	6	3000	RoHS & Green	NIPDAU SN	Level-1-260C-UNLIM	-55 to 150	1631	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CSD16301Q2	WS0N	DQK	6	3000	180.0	9.5	2.3	2.3	1.0	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CSD16301Q2	WSON	DQK	6	3000	189.0	185.0	36.0

GENERIC PACKAGE VIEW


DQK 6

WSON - 0.8 mm max height

2 x 2, 0.65 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

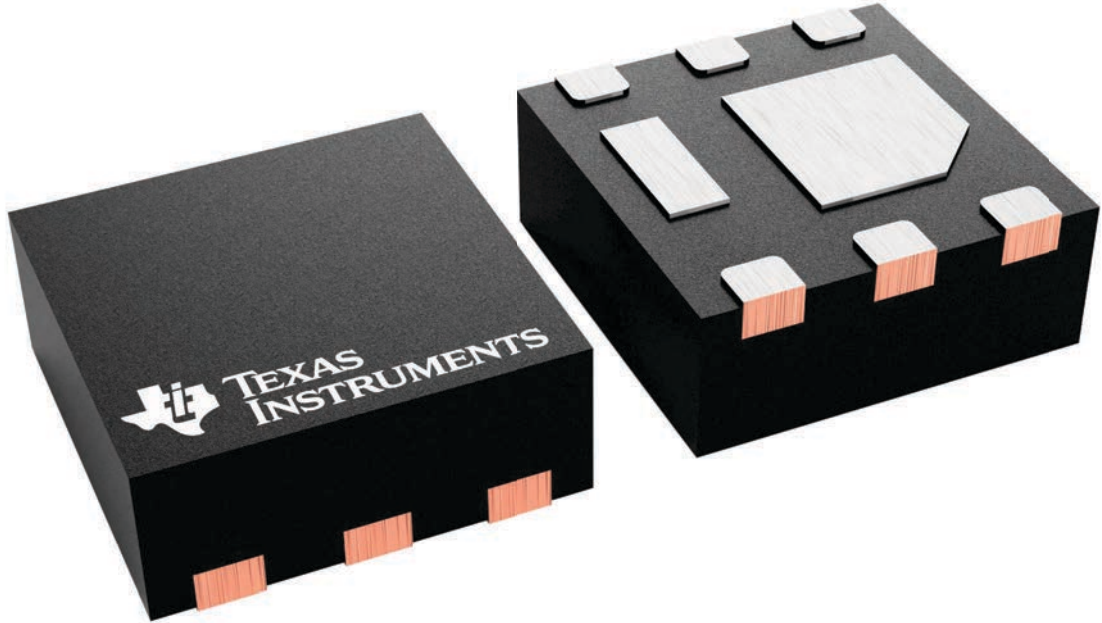


4229807/A

DQK (S-PWSON-N6)

PLASTIC SMALL OUTLINE NO-LEAD

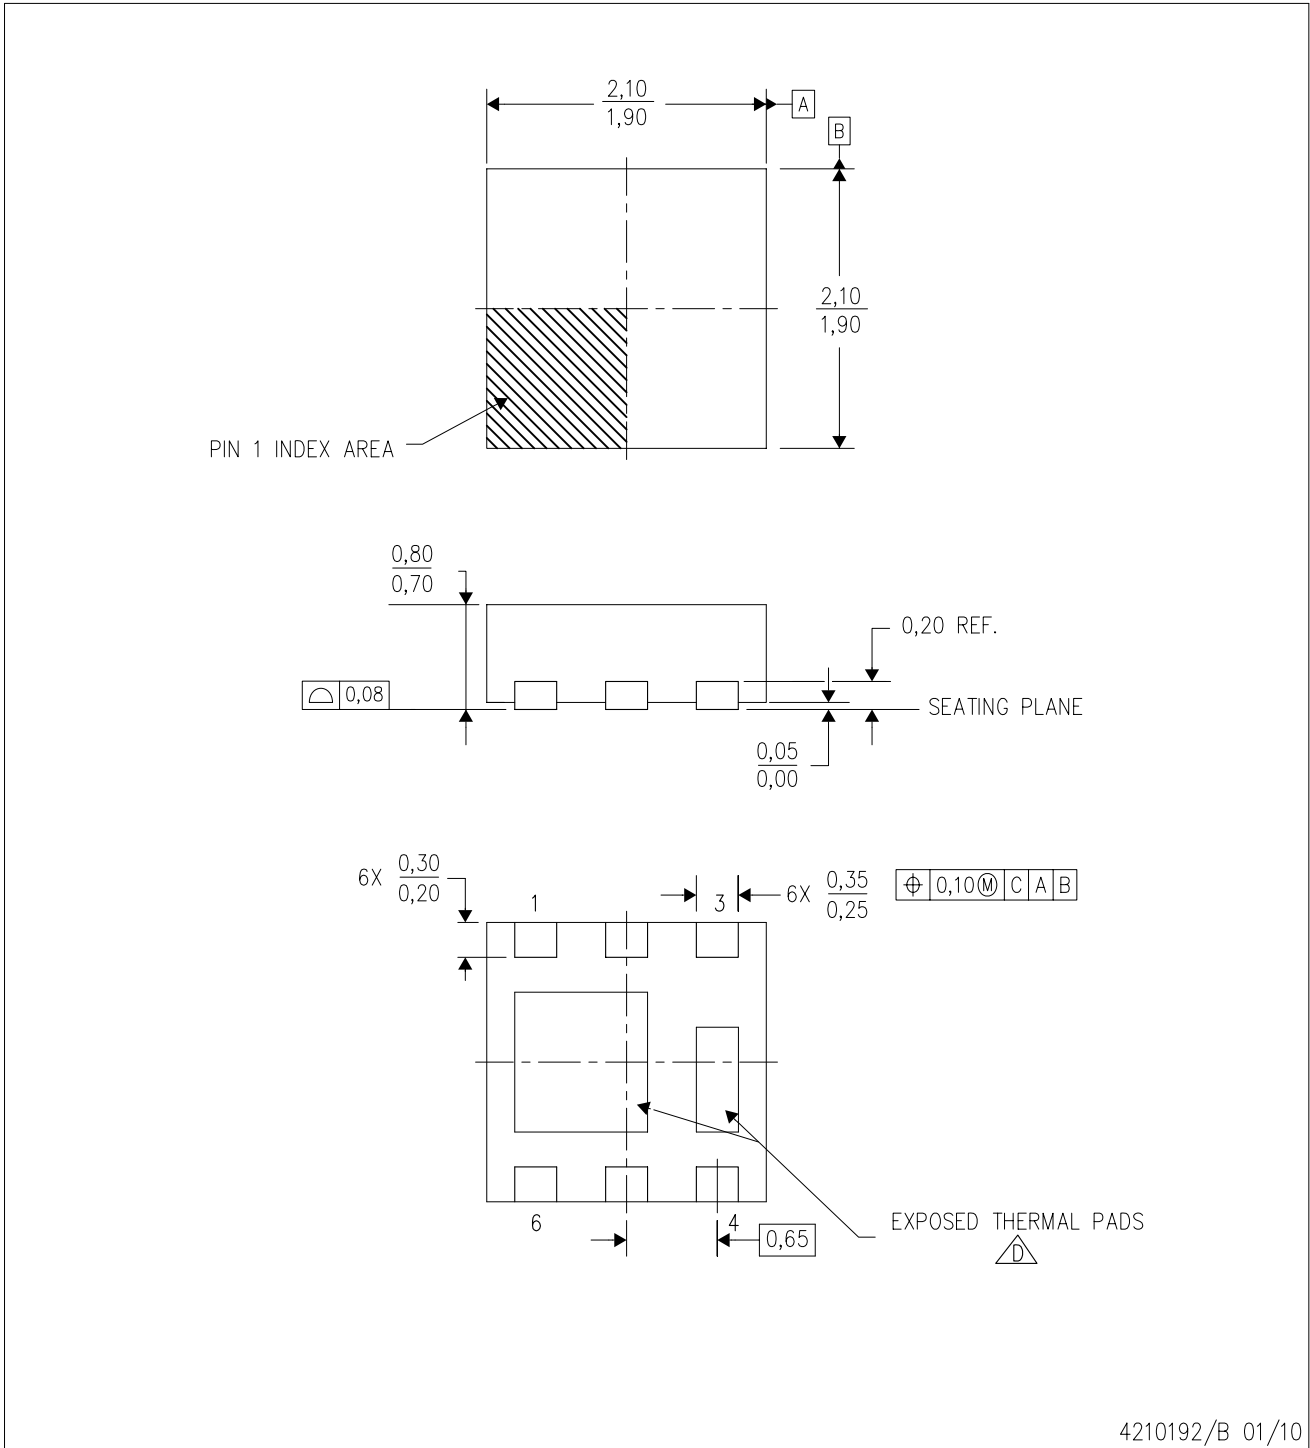

4210192/B 01/10


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Small Outline No-Lead (SON) package configuration.
 -  D. The package thermal pads must be soldered to the board for thermal and mechanical performance.

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, Quad Flatpack No-Lead Logic Packages, Texas Instruments Literature No. SCBA017. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

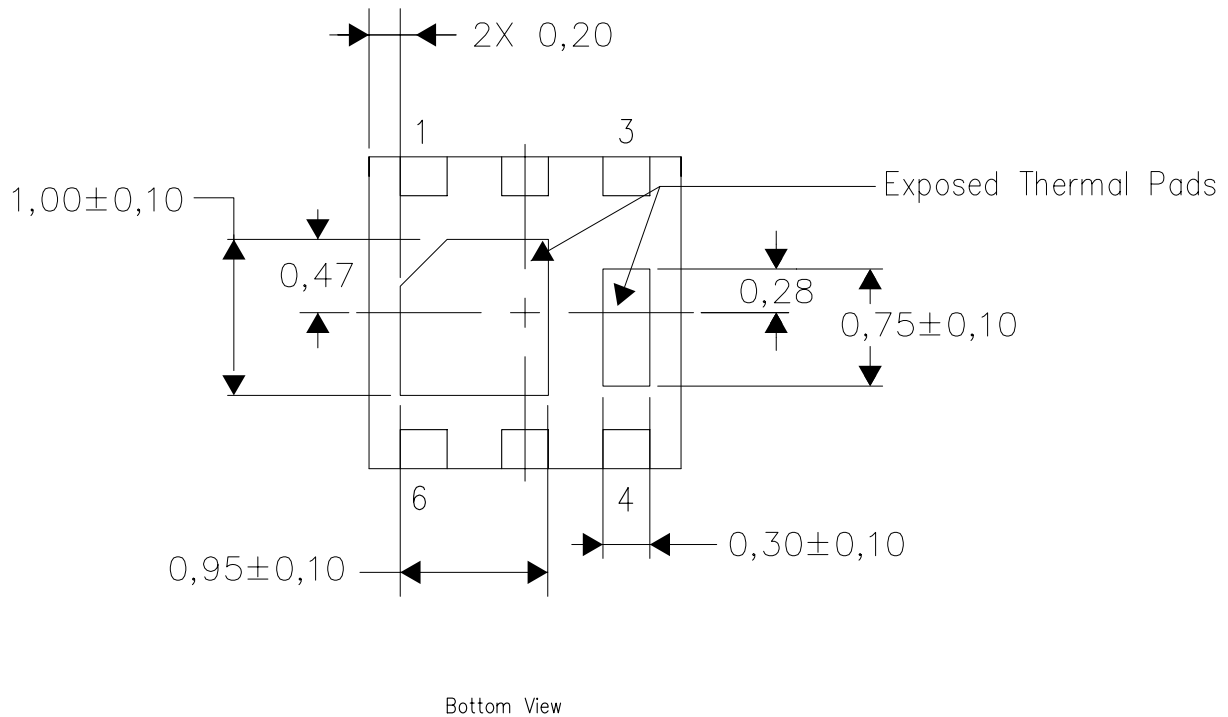

NOTE: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated