

# Technical Reference Manual

## LP875230E-Q1 Technical Reference Manual



### ABSTRACT

This document provides the default register bit values for the one-time programmable (OTP) bits of the orderable part number LP875230ERNFRQ1.

### Table of Contents

<b>1 Introduction</b> .....	<b>1</b>
<b>2 Sequencing</b> .....	<b>3</b>
<b>3 Register Bits Loaded From OTP Memory</b> .....	<b>4</b>
<b>4 Revision History</b> .....	<b>6</b>

### List of Tables

Table 1-1. Main OTP Settings for regulators.....	1
Table 2-1. Startup and Shutdown Sequencing for LP875230E-Q1 .....	3
Table 3-1. Summary of Register Values.....	4

### Trademarks

All trademarks are the property of their respective owners.

## 1 Introduction

This technical reference manual can be used as a reference for the LP875230E-Q1 default register bits after power up. This technical reference manual does not provide information about the electrical characteristics, external components, package, or the functionality of the device. For this information and the full register map, refer to the [LP8752x-Q1 Four-Phase 10A Buck Converter With Integrated Switches data sheet](#).

[Table 1-1](#) provides the quick overview of each regulator default OTP settings. [Section 2](#) provides an overview of default power up and power down sequence. [Table 3-1](#) lists all the default OTP settings after power up.

**Table 1-1. Main OTP Settings for regulators**


Description		Bit Name	Value
Device identification	OTP configuration	OTP_ID	12h
BUCK0+BUCK1 (2-phase operation)	Output voltage	BUCK0_VSET	1030mV
	Enable (ENx pin or I <sup>2</sup> C register write)	EN_BUCK0, EN_PIN_CTRL0, BUCK0_EN_PIN_SELECT	EN1 pin
	Startup delay	BUCK0_STARTUP_DELAY	4ms
	Shutdown delay	BUCK0_SHUTDOWN_DELAY	12ms
	Force PWM	BUCK0_FPWM	Forced PWM
	Force multiphase	BUCK0_FPWM_MP	Forced multi-phase operation
	Peak current limit	ILIM0, ILIM1	4.0A
	Maximum load current	N/A	6A
Slew rate	N/A	1.9mV/μs	

**Table 1-1. Main OTP Settings for regulators (continued)**

Description		Bit Name	Value
BUCK2	Output voltage	BUCK2_VSET	1800mV
	Enable (ENx pin or I <sup>2</sup> C register write)	EN_BUCK2, EN_PIN_CTRL2, BUCK2_EN_PIN_SELECT	EN1 pin
	Startup delay	BUCK2_STARTUP_DELAY	0ms
	Shutdown delay	BUCK2_SHUTDOWN_DELAY	15ms
	Force PWM	BUCK2_FPWM	Forced PWM
	Peak current limit	ILIM2	3.0A
	Maximum load current	N/A	2A
	Slew rate	N/A	1.9mV/μs
BUCK3	Output voltage	BUCK3_VSET	1350mV
	Enable (ENx pin or I <sup>2</sup> C register write)	EN_BUCK3, EN_PIN_CTRL3, BUCK3_EN_PIN_SELECT	EN1 pin
	Startup delay	BUCK3_STARTUP_DELAY	8ms
	Shutdown delay	BUCK3_SHUTDOWN_DELAY	8ms
	Force PWM	BUCK3_FPWM	Forced PWM
	Peak current limit	ILIM3	3.0A
	Maximum load current	N/A	2A
	Slew rate	N/A	1.9mV/μs
Spread spectrum		EN_SPREAD_SPEC	ENABLED
Switching frequency		N/A	2MHz
I <sup>2</sup> C address		N/A	60h

## 2 Sequencing

Figure 2-1 shows the generic power up and power down timing diagram. Startup delay is the delay from the rising edge of ENABLE signal. Shutdown delay is the delay from the falling edge of ENABLE signal. Note that the ENABLE pin assignment/control method and exact power up and power down sequencing depends on the timing values defined in the OTP and specified in Table 2-1.

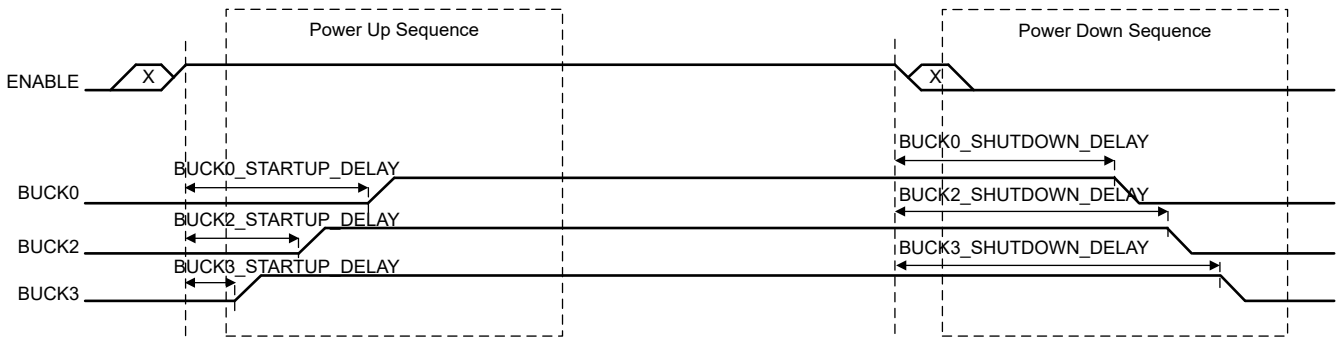

**Figure 2-1. Generic Startup and Shutdown Sequences of the Regulators**

**Table 2-1. Startup and Shutdown Sequencing for LP875230E-Q1**

	BUCK0+BUCK1	BUCK2	BUCK3
<b>Control</b>	EN1 pin	EN1 pin	EN1 pin
<b>Startup delay</b>	4ms	0ms	8ms
<b>Shutdown delay</b>	12ms	15ms	8ms

### 3 Register Bits Loaded From OTP Memory

Table 3-1 lists all the default register bit values loaded from the OTP memory during device start-up.

**Table 3-1. Summary of Register Values**

Address	Register Name	Bit	Value	Description
0x01	OTP_REV	OTP_ID[7:0]	12h	12h
0x02	BUCK0_CTRL1	EN_BUCK0	01h	ENABLED
0x02	BUCK0_CTRL1	EN_PIN_CTRL0	01h	EN1 pin
0x02	BUCK0_CTRL1	BUCK0_EN_PIN_SELECT[1:0]	00h	EN_BUCK0 bit AND EN1 pin
0x02	BUCK0_CTRL1	BUCK0_FPWM	01h	Forced PWM
0x02	BUCK0_CTRL1	BUCK0_FPWM_MP	01h	Forced multi-phase operation
0x03	BUCK0_CTRL2	ILIM0[2:0]	05h	4.0A
0x03	BUCK0_CTRL2	SLEW_RATE0[2:0]	05h	1.9mV/μs
0x04	BUCK1_CTRL1	EN_BUCK1	01h	ENABLED
0x04	BUCK1_CTRL1	EN_PIN_CTRL1	01h	EN1 pin
0x04	BUCK1_CTRL1	BUCK1_EN_PIN_SELECT[1:0]	00h	EN_BUCK1 bit AND EN1 pin
0x04	BUCK1_CTRL1	BUCK1_FPWM	01h	Forced PWM
0x05	BUCK1_CTRL2	ILIM1[2:0]	05h	4.0A
0x05	BUCK1_CTRL2	SLEW_RATE1[2:0]	05h	1.9mV/μs
0x06	BUCK2_CTRL1	EN_BUCK2	01h	ENABLED
0x06	BUCK2_CTRL1	EN_PIN_CTRL2	01h	EN1 pin
0x06	BUCK2_CTRL1	BUCK2_EN_PIN_SELECT[1:0]	00h	EN_BUCK2 bit AND EN1 pin
0x06	BUCK2_CTRL1	BUCK2_FPWM	01h	Forced PWM
0x06	BUCK2_CTRL1	BUCK2_FPWM_MP	00h	Automatic phase adding and shedding
0x07	BUCK2_CTRL2	ILIM2[2:0]	03h	3.0A
0x07	BUCK2_CTRL2	SLEW_RATE2[2:0]	05h	1.9mV/μs
0x08	BUCK3_CTRL1	EN_BUCK3	01h	ENABLED
0x08	BUCK3_CTRL1	EN_PIN_CTRL3	01h	EN1 pin
0x08	BUCK3_CTRL1	BUCK3_EN_PIN_SELECT[1:0]	00h	EN_BUCK3 bit AND EN1 pin
0x08	BUCK3_CTRL1	BUCK3_FPWM	01h	Forced PWM
0x09	BUCK3_CTRL2	ILIM3[2:0]	03h	3.0A
0x09	BUCK3_CTRL2	SLEW_RATE3[2:0]	05h	1.9mV/μs
0x0A	BUCK0_VOUT	BUCK0_VSET[7:0]	53h	1030mV
0x0C	BUCK1_VOUT	BUCK1_VSET[7:0]	53h	1030mV
0x0E	BUCK2_VOUT	BUCK2_VSET[7:0]	B1h	1800mV
0x10	BUCK3_VOUT	BUCK3_VSET[7:0]	93h	1350mV
0x12	BUCK0_DELAY	BUCK0_SHUTDOWN_DELAY[3:0]	0Ch	12ms
0x12	BUCK0_DELAY	BUCK0_STARTUP_DELAY[3:0]	04h	4ms
0x13	BUCK1_DELAY	BUCK1_SHUTDOWN_DELAY[3:0]	08h	8ms
0x13	BUCK1_DELAY	BUCK1_STARTUP_DELAY[3:0]	04h	4ms
0x14	BUCK2_DELAY	BUCK2_SHUTDOWN_DELAY[3:0]	0Fh	15ms
0x14	BUCK2_DELAY	BUCK2_STARTUP_DELAY[3:0]	00h	0ms
0x15	BUCK3_DELAY	BUCK3_SHUTDOWN_DELAY[3:0]	08h	8ms
0x15	BUCK3_DELAY	BUCK3_STARTUP_DELAY[3:0]	08h	8ms
0x16	GPIO2_DELAY	GPIO2_SHUTDOWN_DELAY[3:0]	04h	4ms
0x16	GPIO2_DELAY	GPIO2_STARTUP_DELAY[3:0]	0Ch	12ms
0x17	GPIO3_DELAY	GPIO3_SHUTDOWN_DELAY[3:0]	01h	1ms
0x17	GPIO3_DELAY	GPIO3_STARTUP_DELAY[3:0]	00h	0ms
0x19	CONFIG	DOUBLE_DELAY	00h	0-15ms with 1ms steps

**Table 3-1. Summary of Register Values (continued)**

Address	Register Name	Bit	Value	Description
0x19	CONFIG	CLKIN_PD	01h	ENABLED
0x19	CONFIG	EN3_PD	01h	ENABLED
0x19	CONFIG	TDIE_WARN_LEVEL	01h	137C
0x19	CONFIG	EN2_PD	01h	ENABLED
0x19	CONFIG	EN1_PD	01h	ENABLED
0x21	TOP_MASK1	SYNC_CLK_MASK	01h	MASKED
0x21	TOP_MASK1	TDIE_WARN_MASK	00h	UNMASKED
0x21	TOP_MASK1	I_LOAD_READY_MASK	01h	MASKED
0x22	TOP_MASK2	RESET_REG_MASK	01h	MASKED
0x23	BUCK_0_1_MASK	BUCK1_PG_MASK	01h	MASKED
0x23	BUCK_0_1_MASK	BUCK1_ILIM_MASK	01h	MASKED
0x23	BUCK_0_1_MASK	BUCK0_PG_MASK	01h	MASKED
0x23	BUCK_0_1_MASK	BUCK0_ILIM_MASK	01h	MASKED
0x24	BUCK_2_3_MASK	BUCK3_PG_MASK	01h	MASKED
0x24	BUCK_2_3_MASK	BUCK3_ILIM_MASK	01h	MASKED
0x24	BUCK_2_3_MASK	BUCK2_PG_MASK	01h	MASKED
0x24	BUCK_2_3_MASK	BUCK2_ILIM_MASK	01h	MASKED
0x28	PGOOD_CTRL1	PG3_SEL[1:0]	01h	Power-Good-threshold voltage
0x28	PGOOD_CTRL1	PG2_SEL[1:0]	01h	Power-Good-threshold voltage
0x28	PGOOD_CTRL1	PG1_SEL[1:0]	01h	Power-Good-threshold voltage
0x28	PGOOD_CTRL1	PG0_SEL[1:0]	01h	Power-Good-threshold voltage
0x29	PGOOD_CTRL2	HALF_DELAY	00h	0-15ms with 1ms steps
0x29	PGOOD_CTRL2	EN_PG0_NINT	00h	PGOOD signal NOT included to nINT signal
0x29	PGOOD_CTRL2	PGOOD_SET_DELAY	01h	11ms
0x29	PGOOD_CTRL2	EN_PGFLT_STAT	00h	Live status of monitored voltage outputs
0x29	PGOOD_CTRL2	PGOOD_WINDOW	01h	Overvoltage and undervoltage monitoring
0x29	PGOOD_CTRL2	PGOOD_OD	01h	Open-drain output
0x29	PGOOD_CTRL2	PGOOD_POL	00h	HIGH
0x2B	PLL_CTRL	PLL_MODE[1:0]	00h	PLL disabled, internal RC oscillator
0x2B	PLL_CTRL	EXT_CLK_FREQ[4:0]	01h	2MHz
0x2C	PIN_FUNCTION	EN_SPREAD_SPEC	01h	ENABLED
0x2C	PIN_FUNCTION	EN_PIN_CTRL_GPIO3	01h	GPIO3_OUT bit AND ENx pin
0x2C	PIN_FUNCTION	EN_PIN_SELECT_GPIO3	00h	GPIO3_SEL bit AND EN1 pin
0x2C	PIN_FUNCTION	EN_PIN_CTRL_GPIO2	01h	GPIO2_OUT bit AND ENx pin
0x2C	PIN_FUNCTION	EN_PIN_SELECT_GPIO2	00h	GPIO2_SEL bit AND EN1 pin
0x2C	PIN_FUNCTION	GPIO3_SEL	01h	GPIO3
0x2C	PIN_FUNCTION	GPIO2_SEL	01h	GPIO2
0x2C	PIN_FUNCTION	GPIO1_SEL	00h	EN1
0x2D	GPIO_CONFIG	GPIO3_OD	01h	Open-drain output
0x2D	GPIO_CONFIG	GPIO2_OD	00h	Push-pull output
0x2D	GPIO_CONFIG	GPIO1_OD	00h	Push-pull output
0x2D	GPIO_CONFIG	GPIO3_DIR	00h	Input
0x2D	GPIO_CONFIG	GPIO2_DIR	01h	Output
0x2D	GPIO_CONFIG	GPIO1_DIR	00h	Input
0x2F	GPIO_OUT	GPIO3_OUT	01h	Logic high level
0x2F	GPIO_OUT	GPIO2_OUT	01h	Logic high level

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
January 2024	*	Initial Release

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024, Texas Instruments Incorporated